



IMEX-SC08CW

Steam car wash helps to save water and detergent. The average water consumption of our steam equipment is **0,1 Liter per Minute** whereas a common small-medium size high pressure washer consumes approximately **6-7 Liter per Minutes**.



Technical Details	
Input Power	230V – 50Hz
Housing Material	Stainless steel
Boiler Capacity	3 Liters
Boiler Power	3500W
Maximum Steam Pressure	8 Bar (116 Psi)
Internal Water Tank Capacity	5 Liters
External Extra Water Tank Capacity	15 Liters
Main Unit Dimension	46x38x46H cm
Weight	23 Kg
FUNCTIONS:	DRY STEAM
	HOT HYDROJET



IMEX.-SC08CW is an industrial steam cleaner with continuous steam system for non-stop use. A cold water refilling tank is feeding the water into the boiler automatically and it can be refill at any time even while working.


The functions of the machine, dry steam and hot hydro-jet, are controlled by the steam gun. By pulling the trigger the steam is released and stops as soon as the trigger is released.

By pusghing on the red button a small amount of extra water is injected into the steam with a hydro-jet effect, useful for car wash when more water is needed.







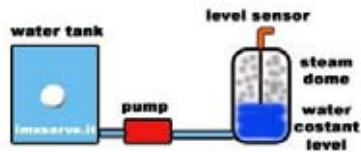










Front panel has been designed to be very simply;

- On/Off level
- On LED
- Empty water tank LED
- Ready to work LED (it blinks while heating process).
- Water switch button (for hydro-jet function)
- Pressure manometer
- Steam speed regulator
- Socket to connect steam flexible hose.



All our steam car wash equipment are provided with the so called continuous steam system. It consists of a separated cold water tank that automatically fills the necessary amount of water to keep a constant water level in the boiler.

In this way it never happens that boiler remains without water, and when the water ends up in the cold tank the operator can refill immediately without any waste of time.

STANDARD ACCESSORIES				OPTIONAL	
	6mt steam flexible hose with gun with metal end tip and rubber cover for car-wash		Medium round steam nylon bristled brush	SWS biodegradable detergent for exterior car steam cleaner (0,95 Liter/bottle)	
	3mt steam hose with handle		Window steam cleaner		
	steam extension tubes (2pcs/set)		Small detail nylon bristled brush		
	steam nozzle with metal end tip		Small detail metal bristled brush		
	rectangular steam brush		rectangular microfiber steam pad		
	Joint / Elbow for brushes		triangular microfiber steam pad		
	triangular steam brush		microfiber cloth		